


FEATURES

- 1- Generate 2.5, 1.0 and 1.8 volts from single power supply (VIN).
- 2- Variable VIN between 4.5-12 Volts.
- 3- Ability to externally Enable/Disable output voltages.
- 4- Current sense outputs for 1.0 voltage. This can be connected directly to XILINX system monitor.



BLOCK DIAGRAM

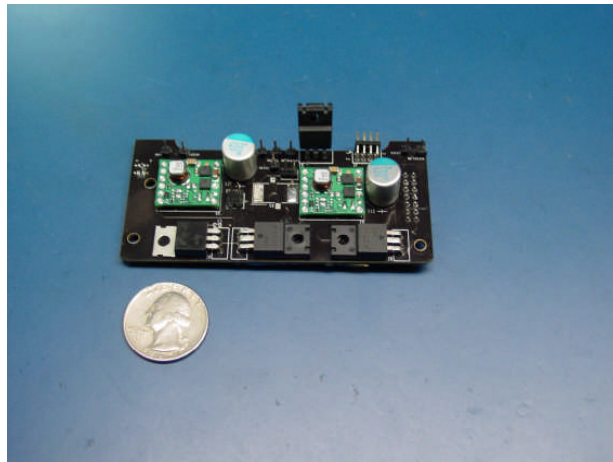